


NOTE:

1. GYPSUM BOARD SHALL BE MOUNTED WITH STAGGERED SEAMS BETWEEN LAYERS, FINAL LAYER SHALL BE TAPED AND MUDDIED AT JOINTS.

2. ALL SEAMS AND PENETRATIONS SHALL BE CAULKED AIRTIGHT WITH ACOUSTICAL NON-HARDENING CAULK.

3. WALL SEAMS SHALL BE TAPED AND MUDDIED

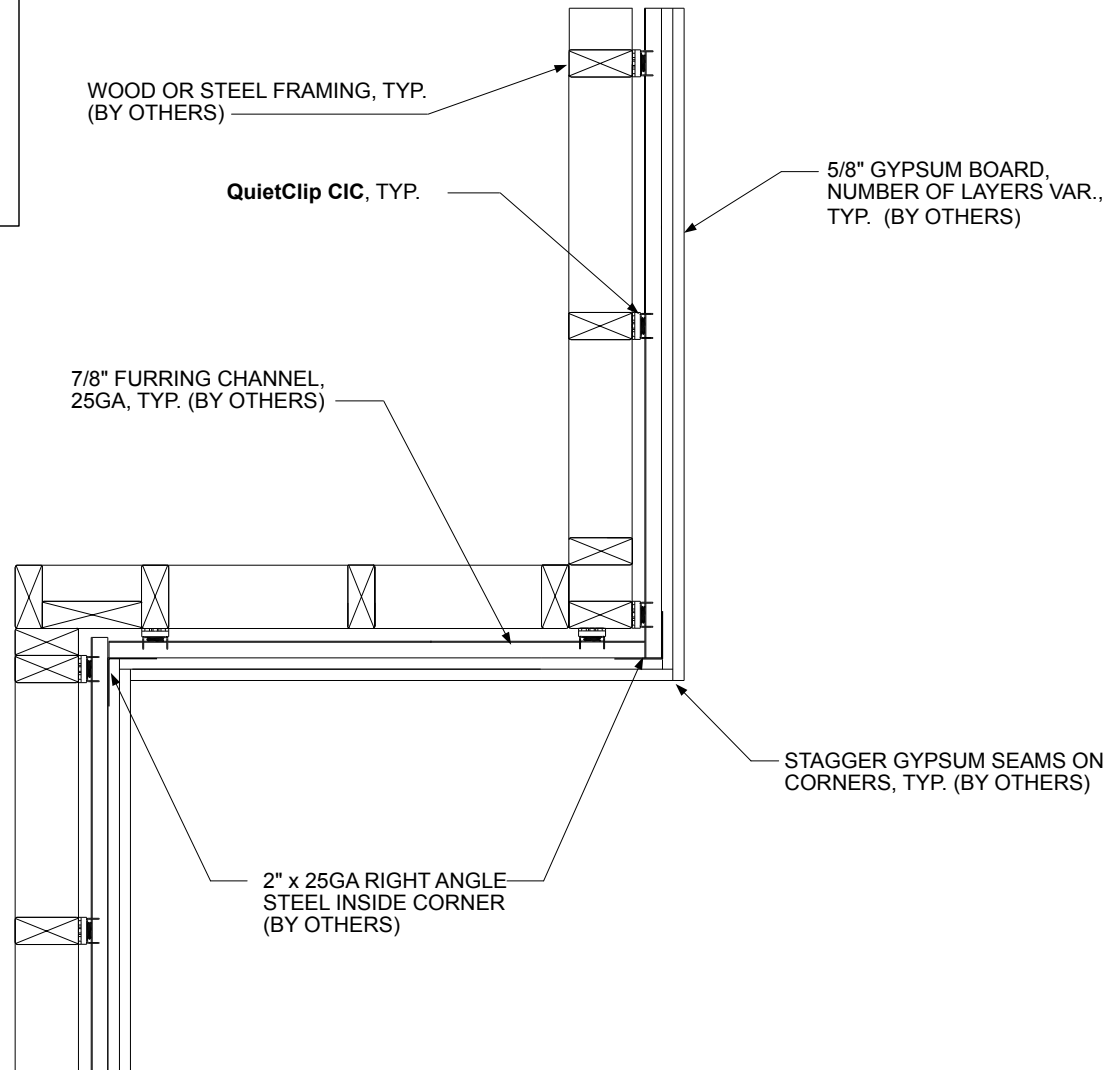

SCALE: N.T.S.

SHEET 1/1