
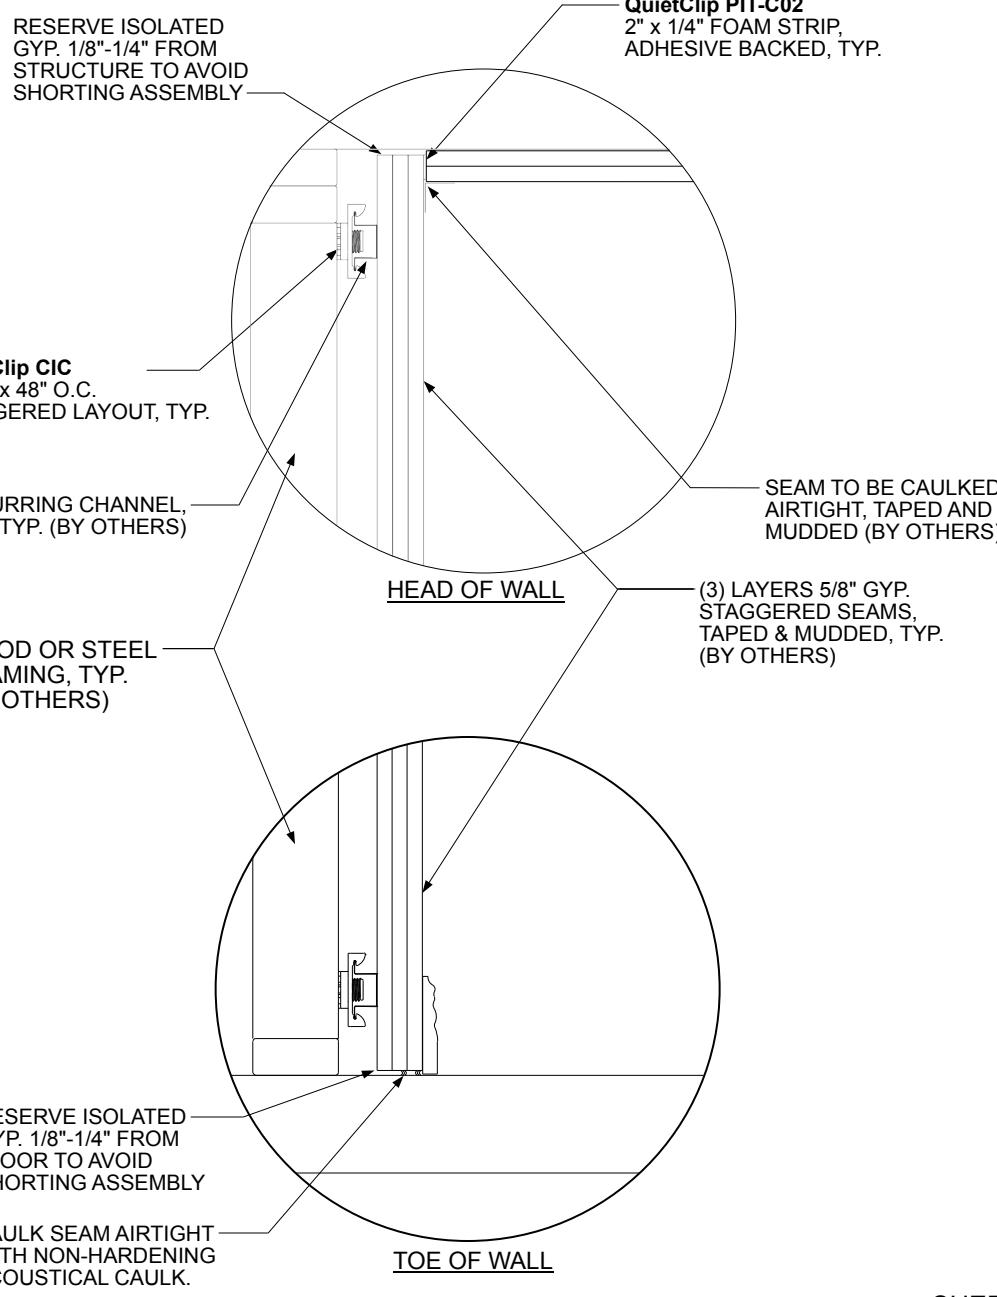


NOTE:

1. GYPSUM BOARD SHALL BE MOUNTED WITH STAGGERED SEAMS BETWEEN LAYERS, FINAL LAYER SHALL BE TAPE AND MUDDDED AT JOINTS.
2. ALL SEAMS AND PENETRATIONS SHALL BE CAULKED AIRTIGHT WITH ACOUSTICAL NON-HARDENING CAULK.
3. WALL SEAMS SHALL BE TAPE AND MUDDDED

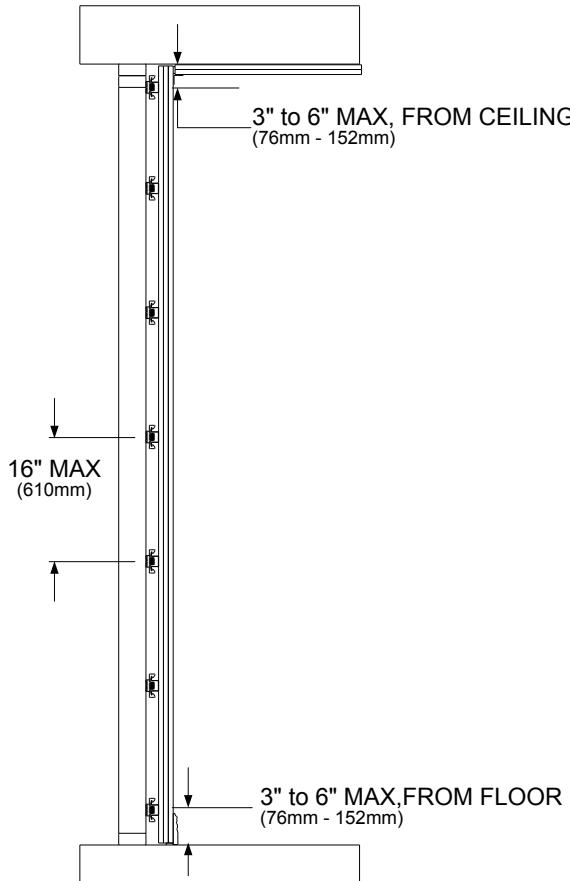

SCALE: N.T.S.

SHEET 1/1