
# **QuietClip™ CIC**

Channel Isolation Clip

A resilient sound isolation clip engineered for structural isolation in drywall wall and ceiling assemblies.

QuietClip™ ClC features a unique, proprietary low dynamic stiffness rubber bearing, designed for maximum deflection and superior fire performance. The integrated steel failsafe ensures proper compression during installation to maximize isolation efficiency.

- Utilizes Low Dynamic Stiffness Elastomer
- Integrated Structural Failsafe
- Superior Fire & Smoke Performance

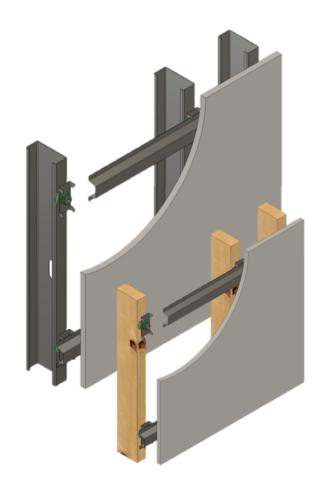



#### **QuietClip™ CIC Benefits**

- 36 lbf/clip Acoustical Design Load
- ✓ Low Dynamic Stiffness Isolator
- Integrated Failsafe for Perfect Compression
- ✓ Non-Flammable Specialty UL-94 Rubber

Q2025-v250530



# QuietClip™ ClC Channel Isolation Clip

## Specification:

Total Deflection: 1/4" (6mm)

Resulting Cavity: 1-5/8"

Acoustical Design Load: 36 lbf/clip

Fire Performance: UL-94 V0 Elastomer

Suitable for Walls: yes Suitable for Ceilings: yes

Compatible with: 7/8" 25 ga. furring hat channel, hemmed edges


#### Fastener Specification:

Wall Installation: wood frame: #8 x 2-1/2" coarse thread

steel frame: #8 x 1-5/8" self-tapping fine thread screws

Ceiling Installation: wood joist: #8 x 3" coarse thread

steel frame: #8 x 2" self-tapping fine thread screws







# QuietClip™ ClC Channel Isolation Clip

Layout guidelines, details, and installation instructions are available on our website. Tailored and project-specific details are available upon request.

### Staggered Installation Guide for 1-2 Layers of Drywall

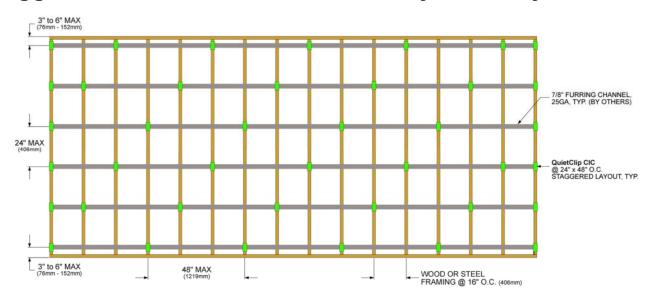

### **Installation Guide with Door and Window Penetrations**

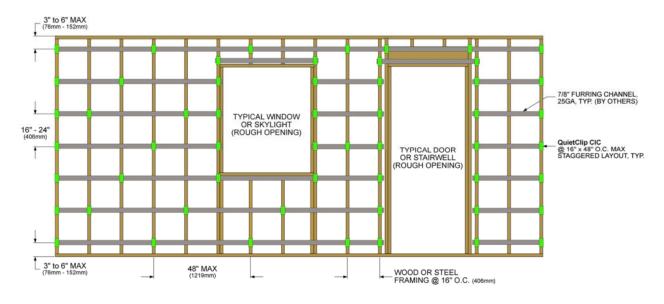

Q2025-v250530